

Model: W45BX-CL Code: W710540000

Functions Blast chilling, blast freezing, proving, defrosting, storage, chocolate, yoghurt, bottle chilling

Operating modes Standard programs, with core temperature probe, without core temperature probe

Standard fittings 2 racks 448 x 325 x 32 mm, core temperature probe, sanitizer

Temperatures -40°C / +45°C

Capacity 26 litres, 3 trays

Interior measurements 455 x 349,5 x 178mm

Cooling capacity 900W [Evap - 10°C cond. +40°C]

Exterior finish Glass, Scotch Brite Fan speed Adjustable from 25% - 100%

Weight 55 kg

Exterior measurements 595 x 575 x 462 mm

Power supply 220V-240V / 50Hz

Interior finish AISI 304 stainless steel scratch-resistant






Display Touch screen, 4.3 inches


Refrigerant gas R 290, GWP 3,3

Packaging measurements 620 x 680 x 590 mm

Maximum power demand 540 W - 2.8A

Door hinge Bottom, lift-up door

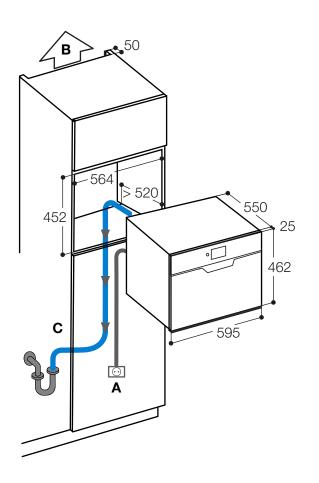



A: 3.40 m-long power cord with Schuko plug.

- **B:** To recirculate air, you will need ducting measuring at least 50 mm in the upper part of the cavity due to house the unit.
- **C:** The unit will need to be connected to the drain.

To order version without drain please add "-DF" after the code of the model you need (example: W60N-CL-DF).



Coldline S.r.I. - via E.Mattei, 38 - 35038 - Torreglia - Padova - Italy - www.coldlineliving.it - info@coldlineliving.it