

Client _____ Quantity _____
Project _____ Position _____

Blast chiller

Model: W3UG

Cod: W11023000001




Technical data

Gross capacity:	51 lt
Temperature range:	-38°+10°C
Refrigerant unit:	Plug-In
Yield +90 / +3:	7 Kg
Yield +90 / -18:	5 Kg
Climate class:	5
Cooling gas:	R452A
Defrost:	Forced air
Dimensions:	625×600×421 mm
Packing dimensions:	640×685×535 mm
Gross weight:	56 Kg
Voltage:	220-240 V - 50 Hz
Total rate:	370 W
Absorbed Current:	1,7 A
Cooling capacity:	579 W*
*:	Evap. -10°C Cond. +45°C

Features

Functions:	Blast chilling and shock freezing soft and hard
Standard equipment:	Support for 4 positions GN2/3
Control:	Electronic display
Doors:	Hinges on left - with 180° dwell
Door gasket:	Magnetic, double chamber and easily replaceable
Insulation:	50 mm thickness - CFC/HCFC free
Exterior/interior finishing:	Exterior and interior AISI 304 stainless steel.
Handle:	Integrated
Racks and slides:	Structure in stainless steel wire AISI 304
Feets:	In PVC adjustable

Technical draw

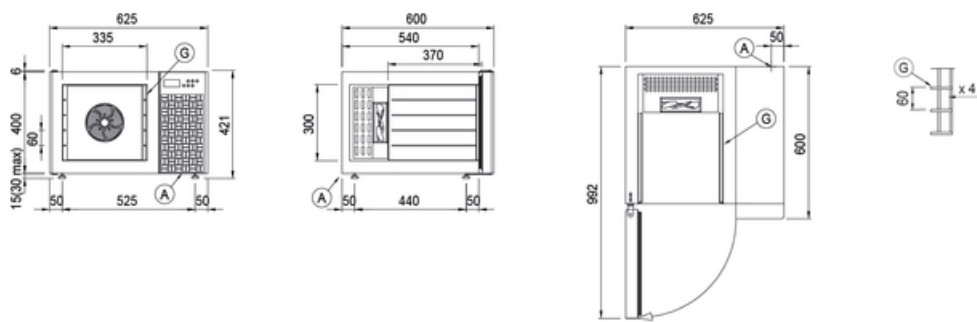

A: Power supply cable outlet

G: Racks pitch